


# INFERNO BULLSEYE GAGE

1.125" View

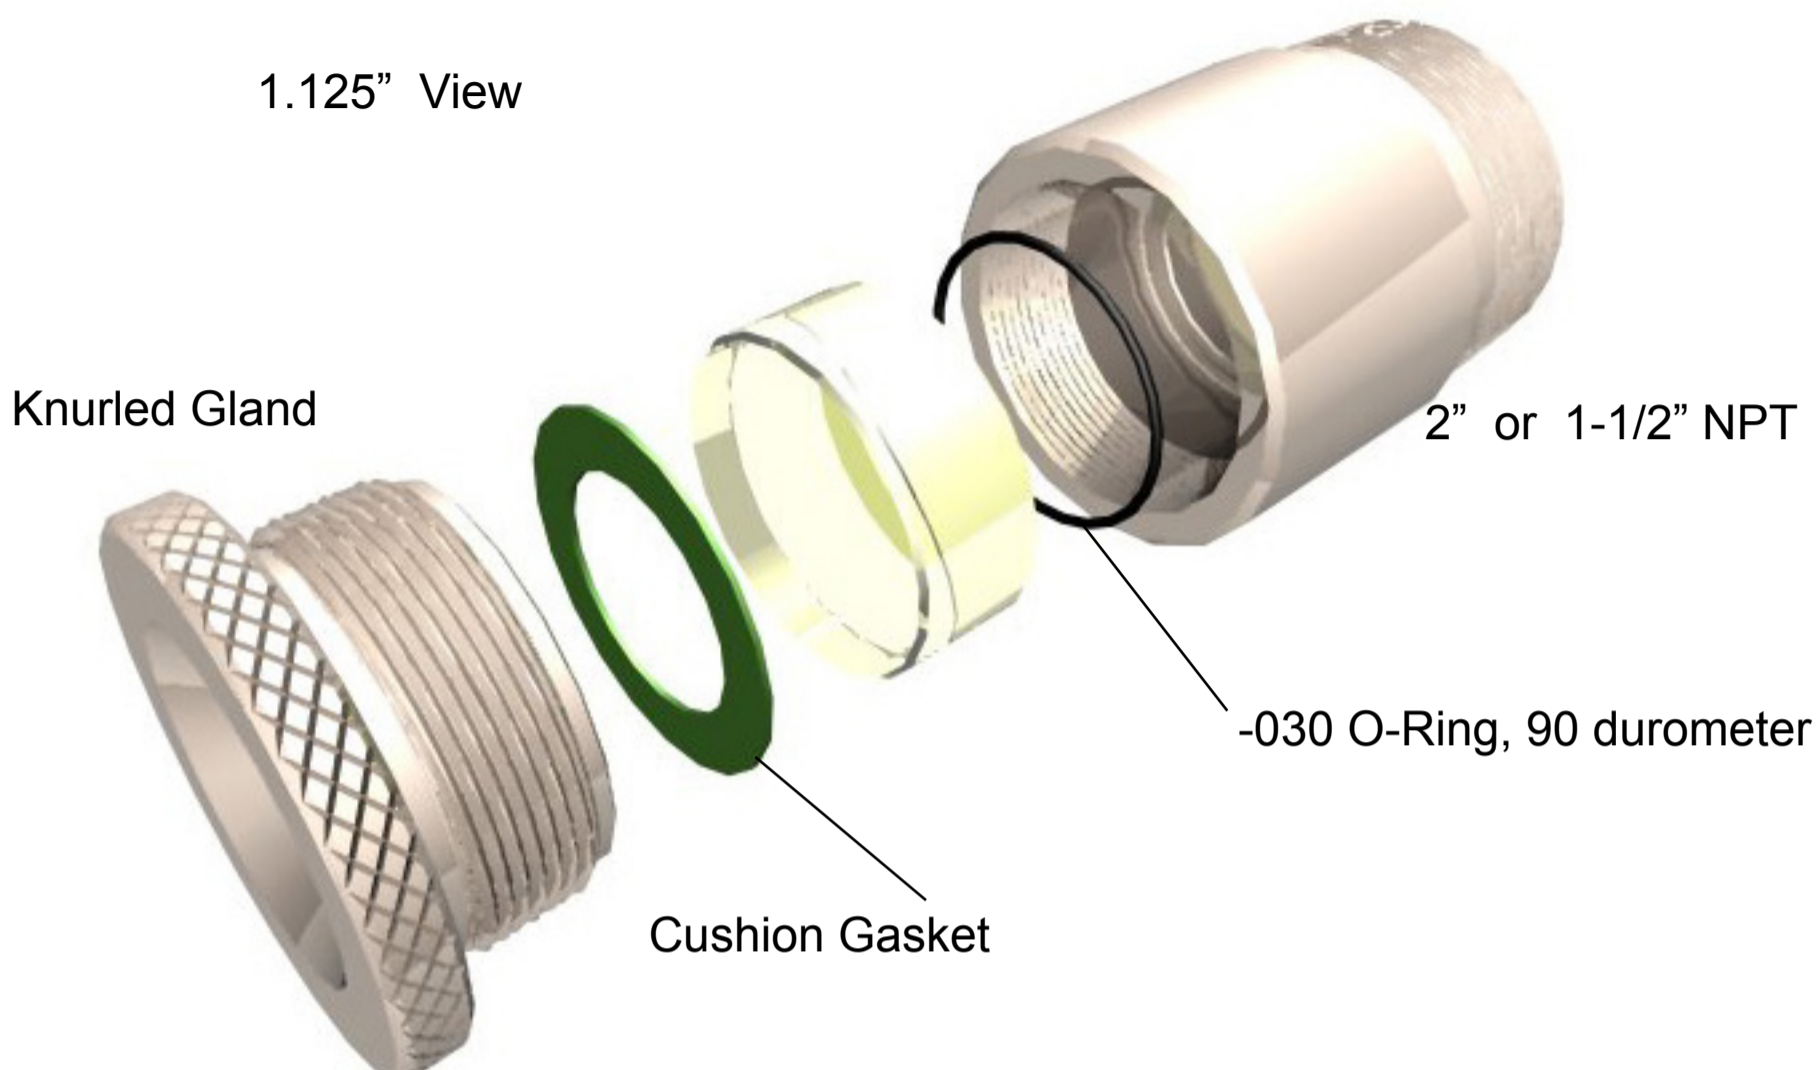

Knurled gland should be hand-tightened only; do not use pipe wrench otherwise glass breakage may occur; do not tighten gland under pressure  
Cushion gasket must be used; otherwise glass breakage may occur  
Replacement O-ring for high pressure must be 90 durometer; otherwise extrusion and loss of seal or glass breakage may occur  
Install new replacement glass with masking tape around edge to prevent contact with sides of body recess; use suction cup if necessary to remove glass from top.  
Glass with chips or scratches should be replaced; otherwise glass breakage may occur... scratches and other surface imperfections form stress risers which can contribute to failure of glass. Glass that has been sandblasted should be replaced immediately.  
Glass lens is specially toughened (tempered) for high strength. Order replacement glass from factory